

## Features

Direct, easy to mount on wall, ceiling and/or in soffit using Easy Install.

Supplied with extra high, black border on upper side for realisation of ideal viewing height.

Triangular support rolls away completely into case. Ideal for building in or recessed ceilings.

Automatic stop for rolling in and out guarantees long lifespan of projection screen fabric.

High quality screen fabrics results in flat-hanging screen.

Screen fabrics complies with the highest standard for fire safety (B1).

Black border increases perceived clarity of projected image.



Quiet, fast motor with 5 year guarantee and CE-quality mark.

## Options

- ▶ Screen fabric types Matte White S, Matte White M and High Contrast S.
- ▶ Formats video (4:3) and HDTV (16:9).
- ▶ Case colours in white and black.
- ▶ See also Cinelpro RF Electrol with built in radio frequency remote control.



▲ Top quality, electrically operated projection screen with extra black border on top for optimum viewing height.

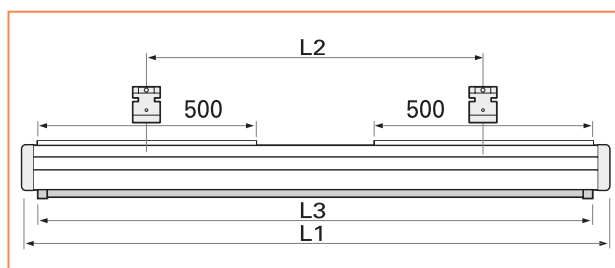

Aspect ratio	Screen size hxw cm	Viewing size hxw cm	Nominal diagonal cm inches	Case			White case			Black case		
				L1 mm	L2 mm	L3 mm	Matte White S prod. code	Matte White M prod. code	High Contrast S prod. code	Matte White S prod. code	Matte White M prod. code	High Contrast S prod. code
4:3	123x160	110x146	183 72	1715	729-1529	1620	10100261	10100001	10100262	10100277	10101001	10100278
	138x180	126x168	213 84	1915	929-1729	1820	10100263	10100002	10100264	10100279	10101002	10100280
	153x200	143x190	254 100	2135	1149-1949	2040	10100265	10100003	10100266	10100281	10101003	10100282
	183x240	173x230	305 120	2535	1549-2349	2440	10100267	10100004	10100268	10100283	10101004	10100284
16:9	90x160	82x146	165 65	1715	729-1529	1620	10100269	10100005	10100270	10100285	10101005	10100286
	102x180	95x168	208 82	1915	929-1729	1820	10100271	10100006	10100272	10100287	10101006	10100288
	117x200	107x190	234 92	2135	1149-1949	2040	10100273	10100007	10100274	10100289	10101007	10100290
	139x240	129x230	269 106	2535	1549-2349	2440	10100275	10100008	10100276	10100291	10101008	10100292

The diagonal sizes listed are approximate in accordance with the market standard. For advice regarding the right size and screen fabric see pages 4-6 or consult the Screen Selector at [www.projectascreeens.com](http://www.projectascreeens.com).



## Technical characteristics

- ▶ Projecta products satisfy the strictest quality and safety requirements in Europe and are CE approved.
- ▶ Projecta ensures that the quality of its products are monitored by the TÜV/GS programme.
- ▶ Mounting brackets and case are made of steel with galvanised interior and outside powder coated in matte white (RAL 9016) or dark grey (RAL 7021), with light grey or black plastic covered end caps.
- ▶ Matte White S : double-sided laminated vinyl on a woven fiberglass support with black backing; gain 1.0 and viewing angle 50° L/R.
- ▶ High Contrast S : double-sided coated grey vinyl on a woven fiberglass support with black backing; gain 1.0 and viewing angle 45° L/R.
- ▶ Matte White M : double-sided calandered vinyl on a non woven fiberglass support with black backing; gain 1.0 and viewing angle 50° L/R (B1).
- ▶ In addition to a 5 cm black border all around, video (4:3) and HDTV (16:9) formats have an extra high, black border.
- ▶ Projection screen fabric(s) satisfies the requirements for fire safety for building materials and building components.
- ▶ All electrical projection screens satisfy the following product safety standards: IEC 60335-1; 60335-2; DIN19045-5 and IEC 61000 for Electro Magnetic Compatibility.
- ▶ Somfy motor with 32 RPM (rotations per minute) and 90 Watts. Motor with 5 years guarantee.
- ▶ Pre programmed final setting for rolling in and out of projection screen fabric makes rapid installation possible.
- ▶ Motor can be directly accessed for adjusting via two openings under the case.
- ▶ Supplied complete with 3 metre long 4-veined plug & play cable. The cable has a plug on one side for connection to the motor and four loose wires on the other side for connection to the rotary switch supplied standard with the screen for wall installation.

## Accessories (see pages 16-17 and 72-73)

### Accessories for mounting

- ▶ Ceiling brackets for mounting in high rooms or under recessed ceilings.
  - 10800004 max.100 cm long in white
  - 10800017 max.100 cm long in black
- ▶ Bracket kit for easy mounting in soffit, 10800089
- ▶ Ceiling mounting kit Easy Install
  - 10800060 180 cm, 10800061 200 cm, 10800062 240 cm
  - 10800063 280 cm, 10800064 300 cm

### Accessories for operation

- 10800009 Key switch
- 10800055 Easy Install RF remote control
- 10800056 Easy Install RF projector trigger
- 10800057 Easy Install RF remote control and projector trigger
- 10800059 Easy Install RF projector trigger with cable
- 10800058 Easy Install IR remote control
- 10800068 Install plug & play relaybox with dry contacts
- Easy Install cable with switch plug&play
- 10800049 5m (EU) 10800050 10m (EU)
- 10800053 5m (UK) 10800054 10m (UK)

For more Easy Install detailed information, see pages 16-17.

### Screen Designer

With the Screen Designer, Projecta helps you to determine the perfect custom solution.

Aspect ratio	Net weight in kg	Up/down in sec.	Max. screen fabric height in cm	Extra border in cm
4:3	17	16	182	62
	19	16	182	46
	21	16	182	29
	26	17	188	5
16:9	17	16	182	90
	19	16	182	77
	21	16	182	65
	26	17	188	49